

PAINT SCHEDULE	
SUPPLIED AND APPLIED BY GENERAL CONTRACTOR. (REFER TO SPECIFICATIONS)	
1. PAINT ALL EXPOSED WALLS, CEILING, AND FLOORING INCLUDING BEHIND TILES OR MULLING THROUGHOUT ENTIRE SALES AREA UP TO CEILING (OR 12'-0" AFF IN OPEN C.G. CONDITION) UNO; ABOVE CEILING (OR 12'-0" AFF.) TO REMAIN AS SALES NON-SALES - EXIST FINISH TO REMAIN NO PAINT IF NEW ONLY COAT OF PRIMER TO SEAL WALL.	
2. G.C. TO FINISH PAINT ALL NEW METAL DOORS AND FRAMES (FIELD APPLY ONE COAT LATEX PRIMER - TWO COATS FINISH.)	
3. REFER TO SPEC. DIVISION IX, SECTION D - PAINTING, FINISHING AND MULLCOVERING	
4. G.C. IS TO LEAVE ON SITE A MINIMUM OF ONE QUART OF EACH COAT OF PAINT USED	
5. NO ALTERNATES TO FINISHES WILL BE ACCEPTED	


WALLCOVERING SCHEDULE	
WC-1	VINYL-FLOR 330-090 COLOR ULTRA WHITE, SERIES PLAIN STRIPLE - 54" WIDE PROVIDED BY OWNER - INSTALLED BY G.C.
WC-2	VINYL-FLOR 330-090 COLOR BLUE, SERIES PLAIN STRIPLE - 54" WIDE PROVIDED BY OWNER - INSTALLED BY G.C.
WC-3	BLUE TONE HEARTS
WC-4	WHITE HEARTS-ON-BLUE BACKGROUND

FLOOR COVERING SCHEDULE	
FC-1	PAINTED CONCRETE WITH COLORED FLAKES - OFF-WHITE BASE COLOR. REFER TO FINISH SPECIFICATIONS ON SHEET A31.
FC-2	PAINTED CONCRETE WITH COLORED FLAKES - BLUE BASE COLOR. REFER TO FINISH SPECIFICATIONS ON SHEET A31.
FC-3	2" X 2" BLUE VINYL-TILE
FC-4	2" X 2" WHITE VINYL-TILE
FC-5	6" X 6" CERAMIC-TILE - TORONTO-TILE 1000-FLA-TILE - NATURAL LIBERTY-SERIES (RECOMMENDED) SUPPLIED AND INSTALLED BY G.C. (PROUT TO BE LITTORETTE TILE FINISH SPECIFICATIONS ON SHEET A31)
FC-6	MILK-OFF MAT MOUNT I IN ADA TRANSITION STRIP - VENDOR TBD.
FC-7	12" X 12" VINYL-TILE - ARISTONOK STANDARD EXCELON NO. 5801 "TAIPE", INFERRAL TEXTURE, BASE - ANTI-SLIP COLOR-INTERLATED NO. 72 "HOUSE GREEN", INFERRAL TEXTURE.
FC-8	12" X 12" VINYL-TILE - ARISTONOK STANDARD EXCELON NO. 5801 "TAIPE", INFERRAL TEXTURE.


SPECIAL FINISHES SCHEDULE	
SF-1	PRIMER PAINT SPRAYED ON TOP OR ROLLED ON TOP OF FITTING ROOM WALLCOVERING AND FLOOR WALL PAINT. (PRIMER-BUILDING WITH ULTRA ACETIC ALPHATIC USE BAKED GLASS AND SUBSTITUTION ALLOWED)
SF-2	OPEN
SF-3	WHITE 1/4" R.R.P. PANELING MANUFACTURE ALUMINUM EDGE AND CORNER HOLDINGS, ON RESTROOM WALLS - REFER TO FLOOR AND WALL FINISH PLAN.

FLOORING CODED NOTES	
①	ALIGN TRANSITION WITH FACE OF WALL BASE
②	CENTRALIZE OF EXISTING STOREFRONT ENTRY
③	ALIGN FLOORING TRANSITION WITH BACK OF DOOR JAMB
④	ALIGN FLOORING TRANSITION WITH CENTERLINE OF SERVICE DOOR THRESHOLD PLATE
⑤	G.C. TO CONTINUE FLOORING UNDER CASHWARP AND BACKWARP
⑥	ALIGN TRANSITION WITH CENTER OF VERTICAL TRIM

**PAINT FINISH NOTE:**  
G.C. TO PAINT A 3 1/2" HIGH TOP TRIM PIECE P-5. THIS TOP TRIM IS CONTINUOUS AROUND THE PERIMETER OF THE SALES FLOOR UNLESS NOTED OTHERWISE. THE BOTTOM OF THE TRIM IS PAINTED OTHERWISE ON THE PLAN ABOVE THE TRIM IS PAINTED P-2 (UNO).

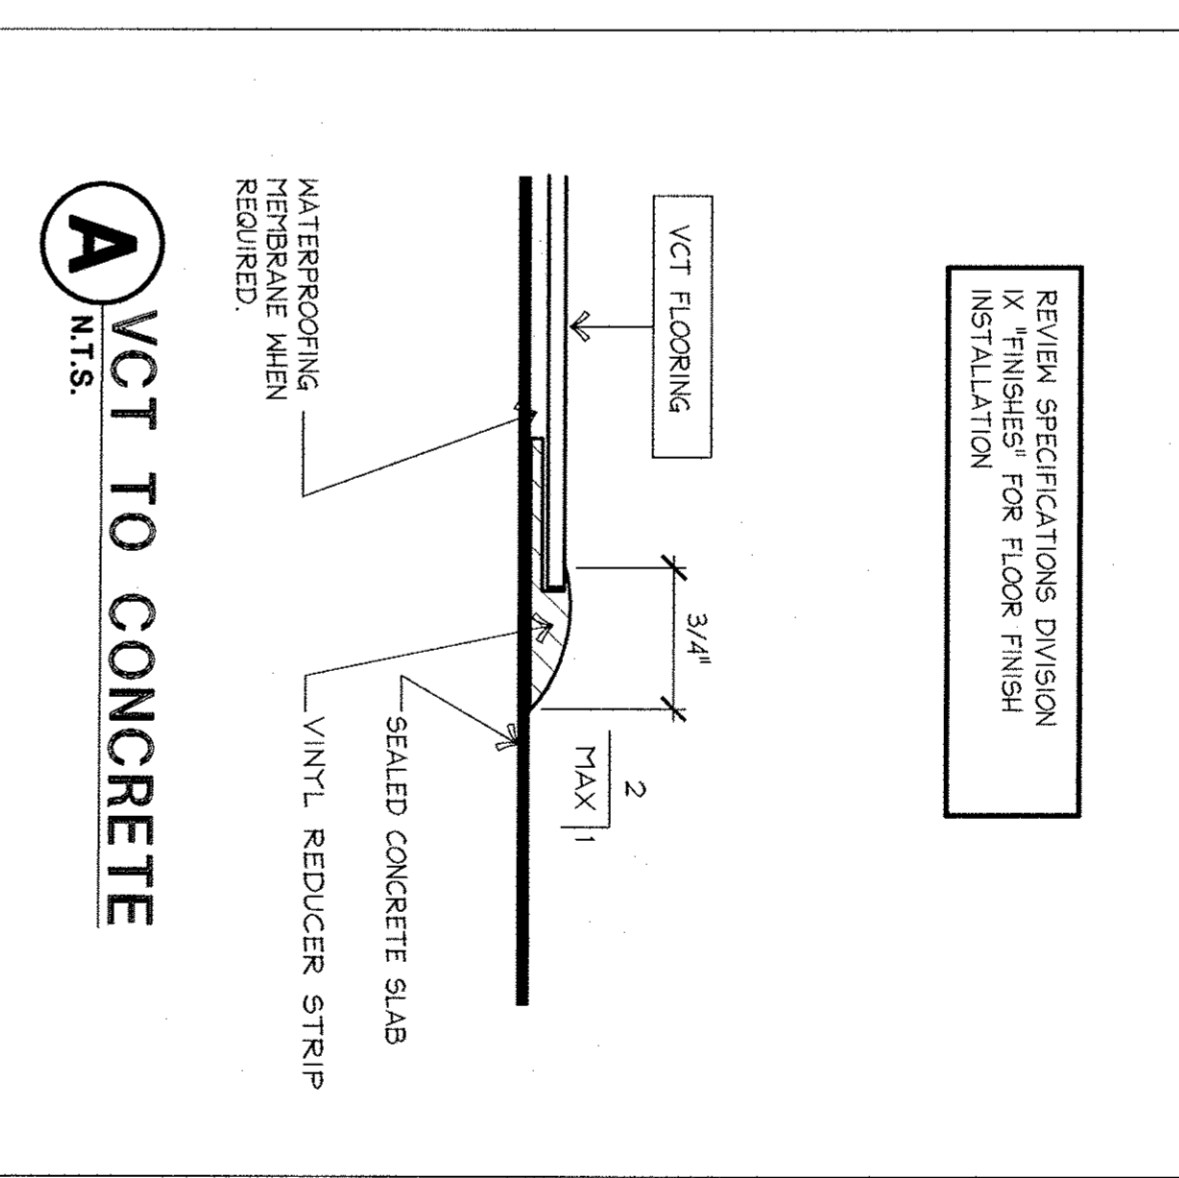

FLOOR WALL BASE SCHEDULE	
B-1	3/4" THICK X 6" HIGH TOP BASE IN SALES AREA ONLY. SCABE WALL BASE TO TOP OF FINISHED FLOOR PAINT P-2 IN FITTING ROOMS ONLY. PAINT P-4 IN ALL OTHER SALES AREAS, REFER TO DETAIL A30.
B-2	6" HIGH CONTINUOUS VINYL COVE BASE IN RESTROOMS ONLY. ARISTONOK COLOR INTEGRATED WALL BASE #88 PALE GRAY OR CONSTRUCTION MANAGER APPROVED COLOR.

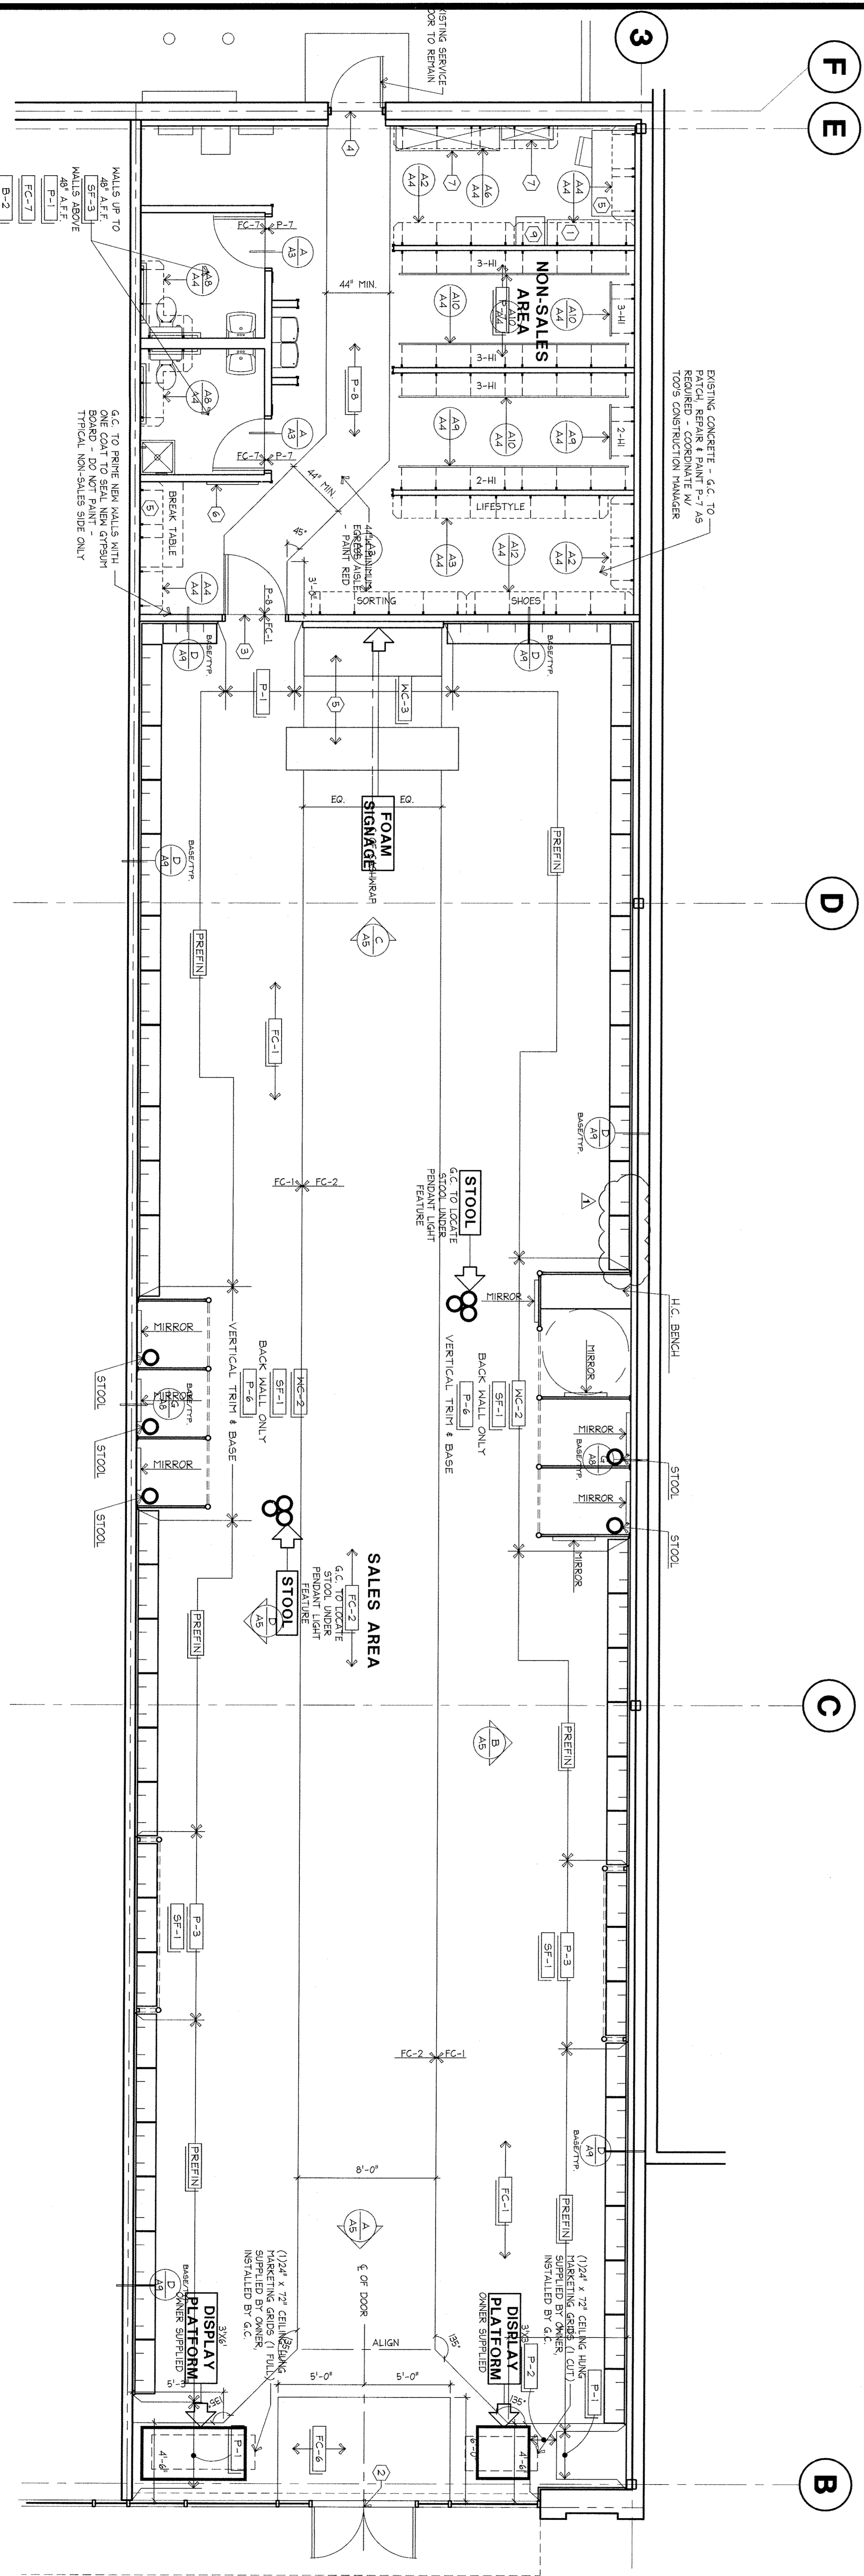

**FLOOR AND WALL FINISH PLAN**  
**JUSTICE TSP 0566**  
**HADLEY CENTER II**  
**5010 HADLEY CENTER DRIVE, SPACE E-2**  
**SOUTH PLAINFIELD, NEW JERSEY 07080**

ISSUE DATE: 02-10-06  
 REVISED: 04-05-06\*  
 SCALE: AS NOTED  
 DRAWN: VDP DSN: NB CHK: ML FRM: AA  
 \* NO REVISIONS THIS SHEET

**too, inc.**  
**STORE PLANNING**  
 8323 WALTON PARKWAY NEW ALBANY, OH 43054 (614) 775-3500

**A3**  
 SHEET  
 30060070566  
 THE CONTRACTOR SHALL BE RESPONSIBLE FOR OBTAINING ALL NECESSARY PERMITS AND APPROVALS FROM THE LOCAL, STATE AND FEDERAL AGENCIES. THE CONTRACTOR SHALL BE RESPONSIBLE FOR OBTAINING ALL NECESSARY PERMITS AND APPROVALS FROM THE LOCAL, STATE AND FEDERAL AGENCIES.